



Rod network belts with hollow pin chain

A-Z Förderband
Marco Skowron



Rod mesh belts are usually driven by sprockets (pulling).
In the case of a higher basis weight or a design-related necessity
(Incline, decline, force), the drive via hollow pin chains is recommended.
The hollow pin chains are driven by sprockets.

Predominantly, wire mesh bands with a pitch of 12.7 mm and
provided with a corresponding hollow pin chain. We also deliver all of them
Possible combinations with hollow pin chains and the producible
Pitch dimensions of the rod mesh tape.

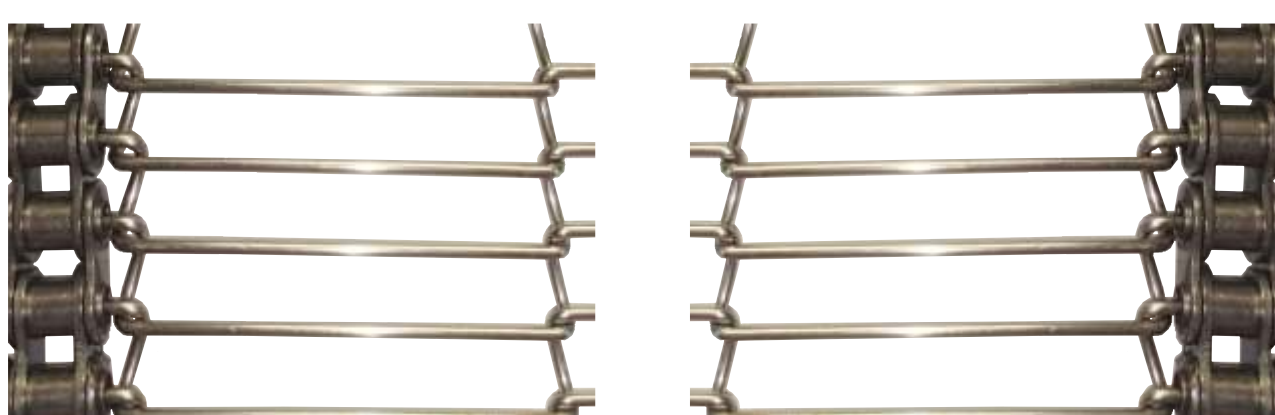

Application examples:

- Deep fryers
- Belt dryer
- Shrink tunnel
- Hardening shops
- High product weight
- Risers



Wir fördern (Ihr) Gut